

Empfohlene Stromwandler für KOSTAL Smart Energy Meter /
Released Current transformer for KOSTAL Smart ENERGY METER

Version: 06/2026

Hersteller / Manufacture	Bezeichnung / Designation	Primär-Strom / Primary current	Sekundär-Strom / Secondary current	Genauigkeitsklasse / Accuracy class	Typ ¹ / Type ¹
MBS AG	KBR 18L 150/5A	150A	5A	1	1
	KBR 18L 200/5A	200A	5A	1	1
	KBR 18L 250/5A	250A	5A	1	1
	KBR 28 300/5A	300A	5A	1	1
	KBR 28 400/5A	400A	5A	1	1
	KBR 28 500/5A	500A	5A	1	1
ABB	CM-CT 100/5	100A	5A	1	2
	CM-CT 150/5	150A	5A	1	2
	CM-CT 400/5	400A	5A	1	2

¹ (1) Kabelbaum / Wiring harness
(2) Kupferschienenmontage / Copper bar mounting


Interner Stromzähler / Stromwandler

Der KOSTAL Smart Energy Meter kann je Außenleiter bis zu 63A direkt messen. Für höhere Ströme werden externe Stromwandler verwendet. Eine Beschreibung zum elektrischen Anschluss von Stromwandlern bei indirekter Messung, finden Sie in der Installationsanleitung zum KOSTAL Smart Energy Meter.

Internal electricity meter / current transformer

The KOSTAL Smart Energy Meter can measure up to 63 A directly per outer conductor. External current transformers are used for higher currents. A description of the electrical connection of current transformers for indirect measurement can be found in the installation manual for the KOSTAL Smart Energy Meter.

Lower 63 A – with separate sensor strip
Kleiner 63 A - ohne separater Sensorleiste

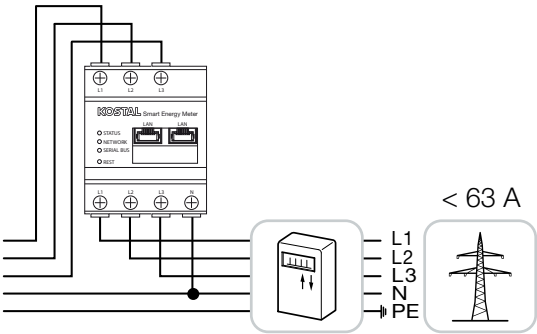

Higher 63 A – with separate sensor strip
Größer 63 A - mit separater Sensorleiste

