



★ SINCE 1947 ★

DEKS
SOLAR
SOLUTIONS
BY DESIGN



✉ sales@deks.co.uk

🌐 www.deks.co.uk

☎ 01275 858 866



View our Solar product range on our website here.



To find your DEKS contact on a Map please connect to our website with this QR code.

SCOTLAND

Neil Cauldwell

BUSINESS DEVELOPMENT MANAGER

neilc@deks.co.uk

07494 230 768

NORTH ENGLAND & IRELAND

Martin Hipkin

BUSINESS & PRODUCT DEVELOPMENT DIRECTOR

martinh@deks.co.uk

07780 446 597

SOUTH WEST & WALES

Damion Smith

BUSINESS DEVELOPMENT MANAGER

damions@deks.co.uk

07903 389 220


SOUTH EAST & HOME COUNTIES

Andy Minas

SALES DIRECTOR

andym@deks.co.uk

07534 294 255

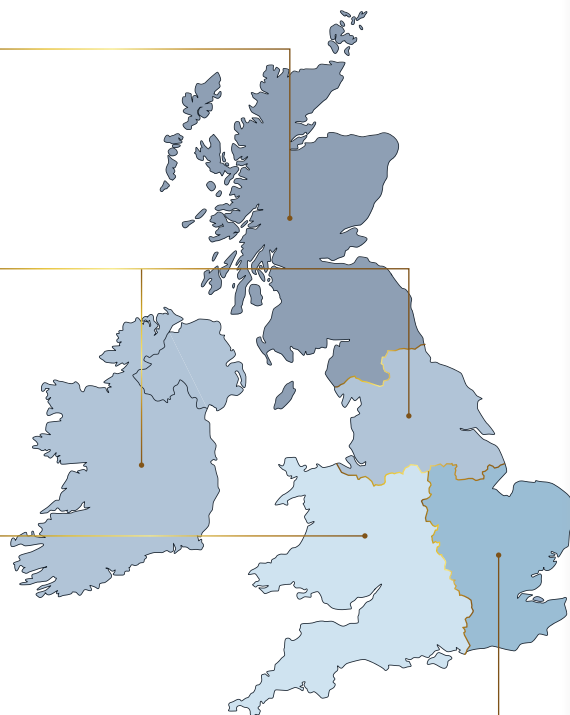

CONTENTS

🔧	SOLARDEK™ DEKTITE® Flashings	4 - 5
🔧	COMMERCIAL CABLE FLASHING	6 - 7
🔧	SOLARDEK™ HookFlash	8
🔧	SOLARDEK™ PanelDrain	8
🔧	SOLARDEK™ Tile Flash®	9
🔧	SOLARDEK™ Solar Console	9
🔧	SOLARDEK™ Bird Protection	10 - 11
🔧	DEKTITE® Battleship	12
🔧	SOLARDEK™ Slate Flash	13
🔧	DEKS FAST FLASH®	14







DRF14MCS
DLR14MCS



DNLS10MB



SDA10MB



DEKTITE® Multicable Solar Flashings

The speciality flashing for solar PV cables on tile, slate or metal roofs.



- Black EPDM High UV Resistance cone
- Available in Aluminium or Nu-Lead® Fast Flash® and Perform® Base
- Weather Seals and Protects up to 10 - 14 Cables
- Multipurpose, safe and weatherproof, all roof type cable entry solution

Pipe External	Roof Pitch	Base Size	Base Type	Code
				Black EPDM
4 - 8mm	Any	490 x 410mm	Nu-Lead®	DNLS10MB
4 - 8mm	Any	450 x 600mm	Aluminium	SDA10MB
0 - 7mm / 0 - 20mm	Tile / Slate / Metal	498 x 280mm	Fast Flash®	DRF14MCS
0 - 7mm / 0 - 20mm	Tile / Slate	498 x 300mm	Perform®	DLR14MCS
BLACK EPDM EPDM will withstand constant temperatures at the roofline of -50°C to 115°C and up to 150°C intermittently				

DNL100B



SDAMINI



DNLS200MPG



SOLARDEK™ Speciality Flashing for Solar Thermal Installations

The purpose-designed SolarDek™ provides the safest, most efficient method of flashing solar thermal pipes and cables on tile and slate roofs. SolarDek™ features the Nu-Lead® base, which will not stain or corrode the roof, together with a long-life Dektite® EPDM or grey silicone cone ideally suited to solar thermal pipe sizes.



- Grey High Temperature Seal
- Complete Weather Proofing
- Safe Protected Nu-Lead® Apron
- Purpose-made Durable Solution to MCS

Pipe External	Roof Pitch	Base Size	Base Type	Code
				Black EPDM
0 - 35mm	0 - 45°	490 x 410mm	Nu-Lead®	DNL100B
0 - 30mm	0 - 45°	450 x 600mm	Aluminium	SDAMINI
BLACK EPDM EPDM will withstand constant temperatures at the roofline of -50°C to 115°C and up to 150°C intermittently				

Pipe External	Roof Pitch	Base Size	Base Type	Code
				Grey Silicone
0 - 35mm x 2	0 - 45°	490 x 410mm	Nu-Lead®	DNLS200MPG
GREY SILICONE Silicone will withstand constant temperatures at the roofline of -50°C to 200°C and up to 250°C intermittently				

DEKTITE® PREMIUM SOLAR

Perfect for Flashing Pipes and Cables on Metal Roofs

The multi-application flashing in a highly durable EPDM or silicone, edged with a flexible aluminium band, flashes pipes and cables on metal roofs. The square base fits most roof profiles.



Dektite® Premium DFE 100/200



Dektite® Premium DFE 101/201



Dektite® Premium Multicable DFE101BM

- For solar pipes or cables
- Suits most roof profiles
- High UV resistance
- Protects up to 12 cables and weatherproofs entry to any metal roof
- Purpose-made durable solution, as required by MCS

Pipe External	Cable External	Roof Pitch	Base Size	Code			Fixing Kit Size
				Black EPDM	Grey EPDM	Red Silicone	
0 - 35mm	4 - 8mm	0 - 45°	100 x 100mm	DFE100BS	DFE100GS	DFE200RES	FX901
5 - 55mm	4 - 8mm	0 - 45°	139 x 139mm	DFE101BS	DFE101GS	DFE201RES	FX901
N/A	4 - 8mm	Any	139 x 139mm	DFE101BM	N/A	N/A	FX901
EPDM	EPDM	EPDM will withstand constant temperatures at the roofline of -50°C to 115°C and up to 150°C intermittently					
RED SILICONE		Silicone will withstand constant temperatures at the roofline of -50°C to 200°C and up to 250°C intermittently					



DEKTITE® FIXING KITS

Dektite® fixing kits are designed for use with DEKS EPDM and Silicone flashings on metal fibre and cement roofs.

The **FX901 Kit** contains 1 x 75ml tube of low modulus silicone, 25 x self-drilling screws, 25 x colour caps (silver).

The **FX902 Kit** (as shown) contains 3 x 75ml tubes of low modulus silicone, 75 x self-drilling screws, 75 x colour caps (silver).

Self-drilling screws should be placed 25-50mm apart.

SOLARDEK™ RUBBER FOOT

Environmentally friendly recycled rubber materials

The SolarDek Rubber Foot complies with the EU ROHS standard. Rubber Feet are supplied with Aluminium 41 x 21 channel section rail with 2 x locking cam bolt, nut, washer and spirit level. The products are a floor mounted rubber support designed to support Air Source Heat Pumps (ASHP), pipe work/cable trays and HVAC units. Additionally, the feet provide moderate amounts of noise and vibration absorption. Suitable for external and internal locations for temperatures between -40°C to 80°C.



Model No.	Description	Specification				Weight (kg/ pair)	Qty/ Pallet	Bearing weight (kg/pcs)	Component
		A (mm)	B (mm)	C (mm)	D (mm)				
SDRF-250	SolarDek Rubber Foot 250mm (80-220kg)	250	163	98	210	4.87kg	210	80-220	2 Sets of Screws & Level
SDRF-400	SolarDek Rubber Foot 400mm (130-330kg)	400	163	98	360	7.33kg	140	130-330	2 Sets of Screws & Level
SDRF-600	SolarDek Rubber Foot 600mm (250-600kg)	600	163	98	560	10.86kg	80	250-600	2 Sets of Screws & Level
SDRF-1000	SolarDek Rubber Foot 1000mm (300-1000kg)	1000	163	98	960	17.93kg	50	300-1000	2 Sets of Screws & Level




COMMERCIAL CABLE FLASHING

• Ideal for Solar Solutions!

Cable Flashing options for Ø32/Ø90/Ø110/Ø160 with Detachable Top for leading cables etc. through flat roofs with bitumen, foil or synthetic membranes.

Our Commercial Cable Flashing solutions are engineered for versatility, durability, and watertight performance - making them the go to choice for contractors, builders, and installers across the UK, Europe, and beyond.

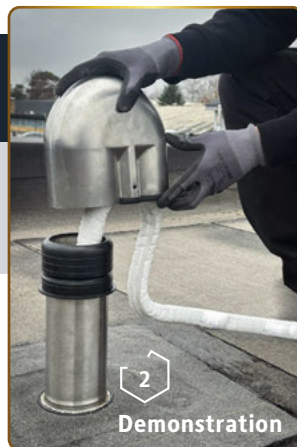

1 Cable Flashing Ø32 for a slim profile. UV and weather resistant with heat shrink sleeve.



2 Cable Flashing Ø90 with detachable top. UV and weather resistant.



3 Cable Flashing Ø90 with detachable top, with pipe below the flange.



4 Cable Flashing Ø110 with detachable bends for easy cable routing and maintenance. UV and weather resistant.




5 Heavy-duty Cable Flashing Ø160 with detachable top. Large, stable base for maximum sealing. High resistance to UV, ozone and weathering.



SIZING INFORMATION

No.	Material	Code	Type	Membrane
1	EPDM	FR-CCF32-EPDM	Cable flashing Ø32	For a full range of Membranes, please contact us at: sales@deks.co.uk
1	SBS	FR-CCF32-SBS	Cable flashing Ø32	
1	Fast Flash® Base	FR-CCF32-FFB	Cable flashing Ø32	
2	EPDM	FR-CCFS-EPDM	Cable flashing Ø90 with detachable top	
2	SBS	FR-CCFS-SBS	Cable flashing Ø90 with detachable top	
2	Fast Flash® Base	FR-CCFS-FFB	Cable flashing Ø90 with detachable top	
3	EPDM	FR-CCFL-EPDM	Cable flashing Ø90 with detachable top, with pipe below the flange ●	
3	SBS	FR-CCFL-SBS	Cable flashing Ø90 with detachable top, with pipe below the flange ●	
3	Fast Flash® Base	FR-CCFL-FFB	Cable flashing Ø90 with detachable top, with pipe below the flange ●	
4	EPDM	FR-CC110-EPDM	Cable flashing Ø110 with detachable top	
4	SBS	FR-CC110-SBS	Cable flashing Ø110 with detachable top	
4	Fast Flash® Base	FR-CC110-FFB	Cable flashing Ø110 with detachable top	
5	EPDM	FR-CC160-EPDM	Cable flashing Ø160 with detachable top	
5	SBS	FR-CC160-SBS	Cable flashing Ø160 with detachable top	
5	Fast Flash® Base	FR-CC160-FFB	Cable flashing Ø160 with detachable top	

NB: ALL HAVE A MATT SURFACE ● TYPE HAS THE PIPE BELOW THE FLANGE

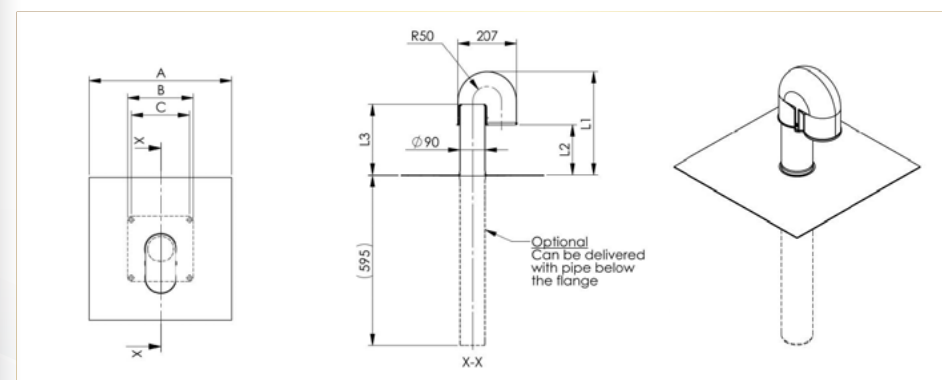

Type (Surface)	Membrane	A	B	C	L1	L2	L3
MATT	Bitumen	500 x 500	230 x 230	204 x 204	362	175	245
	Foil	400 x 400*	230 x 230	200 x 200			

*ON MODELS WITH FOIL MEMBRANE, SIZE A VARIES DEPENDING ON THE FOIL TYPE. FOIL MEMBRANES HAVE ROUNDED CORNERS.

SolarDek™ HookFlash



The complete flashing solution for on-roof installations

The SolarDek™ HookFlash provides a sealing solution for on-roof solar when roof hooks need to be flashed on slate, concrete or flat profile tiles. This together with the Dekтите® Multicable Solar Flashing provides the installer with a water tight peace of mind solution for on-roof solar installations.

Kits includes 1 x SolarDek™ HookFlash and foam insert to flash over on-roof solar roof hooks.
Visit - www.deks.co.uk/hookflash

Code	Base Size
SDHF - S	245 x 230mm
SDHF - L	360 x 360mm



SolarDek™ PanelDrain



Discover the ultimate solution for maintaining the efficiency and longevity of your solar panels with the new SolarDek™ PanelDrain. This innovative water drain clip is specifically designed to enhance solar panel performance by eliminating water and dust accumulation, making it perfect for low-tilt installations from 3° up to 15°.

Visit: www.deks.co.uk/paneldrain

Panel Drain Clips

Various size options available

Code	Base Size
SDPD - 30	30mm
SDPD - 32	32mm
SDPD - 35	35mm


SolarDek™ TileFlash®

Tile flashing solution for on-roof installations

Innovative tile and cable flashing solution for flat tiles. Enables up to 4 cables to pass through the rubber tile as well as creating a cushion for the solar hook. Lower profile design also creates less tile lift when installed with the solar hook. **Your dual-purpose flat tile mounting solution.**



Code	Base Size
SDTF - RO	250mm x 165mm

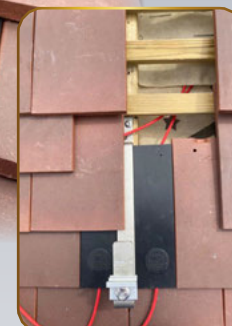

SolarDek™ Solar Console

Flat Roof Solar Console Flashing - The No Ballast Mounting System

When roof weight limits matter, ditch the concrete. The SolarDek™ Flat Roof Console is the smarter, lighter, stronger way to mount solar on flat roofs without loading the structure with tonnes of ballast it was never designed to carry.

At the heart of the system is our precision engineered M10 threaded 316 stainless steel Lug - giving solar installers and roofers a way to mount structures onto **any membrane type** with **huge vertical uplift resistance**. Once it's fixed to the substructure, what you've mounted **stays mounted**, no matter what the weather throws at it.

Here's where it gets clever:

We bond the Lug directly to the **exact membrane on the roof** - fully waterproofed and ready to be installed using the **manufacturer's approved method**. That means the penetration **won't void a warranty**, because it's sealed with **their own material**, exactly as they specify.

DEKS also offer a full range of **high quality stainless steel fixings** to anchor the console to any substructure - steel, timber, plywood, concrete... you name it, we fix it to.

And crucially:

There's **no compression seal, no membrane pull, and no stress points**. Just a secure, waterproof, super strong, bonded fixing you can trust.



Code	Description
FR-SCF-SBS	Bitumen Felt Single Ply
FR-SCF-EPDM	EPDM
FR-SCF-FFB	Fast Flash® Black
FR-SCF-SM	Synthetic Membrane

SolarDek™ Bird Brush



Avoid nesting birds and filthy mess on your solar panels...

A Flexible Solution!

Introducing one of the fastest fitting bird protection products on the market. Specifically designed for on-roof solar, enabling the installer to create a bird proof solution in double quick time. The brush design offers an unobtrusive flexible solution without the need for any special tools or clips to be fitted.



Code	Base Size
SDBB - 1m	Length - 1m Diameter - 160mm

SolarDek™ Bird Mesh

Bird Mesh - Durable Solution

DEKS Bird Mesh is a high-quality avian control solution designed for both durability and long-term performance. Manufactured from 16-gauge, 1.5mm diameter hot-dipped galvanised wire, this mesh provides exceptional strength and resistance to corrosion, ensuring reliable protection against birds.

Code	Description
SDBM-KIT	30m Roll and 150 x 30mm Clips
SDBM-KIT-35mm	30m Roll and 150 x 35mm Clips
SDBM-ST	SolarDek™ Bird Mesh Stainless Ties - 20pcs Per Bag

- 25mm x 12.5mm Openings
- 200mm Wide x 30m Long




SolarDek™ Slide Spikes

Precision Sliding Spikes for a Fast, Clean, Professional Finish

Why SolarDek™ Slide Spikes?

- Fits any profile - universal sliding design
- Fast, clean installation - clips or adhesive
- Strong, UV stabilised cassette - built for long term exposure
- Steel spikes - tough, durable, corrosion resistant
- Neat, consistent finish - cut to length for a custom look

Code	Description
SDSS-160	SolarDek™ Slide Spike - 160mm Deep x 500mm Long (100 Per Box)
SDSS-200	SolarDek™ Slide Spike - 200mm Deep x 500mm Long (100 Per Box)
SDBMC-30	SolarDek™ 30mm Clip (150 Per Box)
SDBMC-35	SolarDek™ 35mm Clip (150 Per Box)

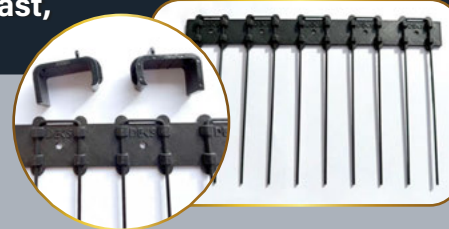

Meet another DEKS smart way to add bird protection to any solar module profile. SolarDek™ Slide Spikes use U shaped steel spikes housed in a **robust, UV stabilised polycarbonate cassette** - a smooth, 500mm unit designed to slide fit, lock on, and look good.

Installation is **seriously quick**. Fit them with our ultra strong DEKS "C" Clips (30mm & 35mm modules) or go for a **clean, bond on finish** using **Black Perform Adhesive**. Slide the spikes into position, trim to length, and you're left with a sharp, consistent, professional finish every time.

PROFESSIONAL, RELIABLE, AND SERIOUSLY QUICK.

SolarDek™ Spikes: *because your time is worth more than bending wire.*

SolarDek™ Drop Spikes

The Fastest, Cleanest Way to Defend Your Solar Investment

Cornering just got easy. SolarDek™ Drop Spikes are the **F1** of bird protection - no forming, no faff, just click, drop, done.

Our **telescopic stainless steel spikes** drop neatly into profile once the base is fixed to the panel. Installation is lightning fast with our ultra strong DEKS "C" Clips (for 30mm & 35mm modules) or by using our **Black Perform Adhesive** for a clean, bond on solution.

Why SolarDek™ Drop Spikes?

- Fastest install on the market - on and off the roof in no time
- Zero forming required - everything fits, everything works
- Super-strong & secure fixing - C Clips or adhesive
- Premium look - supplied in black for a sharp, discreet finish
- Built to last - UV stabilised, corrosion resistant stainless steel



Code	Description
SDDS-160	SolarDek™ Drop Spike - 160mm Deep x 500mm Long (100 Per Box)
SDDS-200	SolarDek™ Drop Spike - 200mm Deep x 500mm Long (100 Per Box)
SDBMC-30	SolarDek™ 30mm Clip (150 Per Box)
SDBMC-35	SolarDek™ 35mm Clip (150 Per Box)



DEKTITE® "BATTLESHIP"

**Tough. Smart.
Solar-Ready!**




Introducing the NEW DEKS "BattleShip".
The Next-Generation Multi-Cable Solar Entry Solution.

Built for speed, strength, and simplicity, the BattleShip redefines how you manage solar cable entry on rooftops and beyond. Engineered for maximum durability and weather resistance, it provides a watertight, seal for multiple cables - cutting installation time while boosting reliability. Whether you're fitting solar, comms, or EV systems, BattleShip delivers clean, professional, and future-proof cable management every time.

The speciality flashing for solar photovoltaic installations.

Forming part of the **SolarDek™ range**, our purpose made solutions for Solar PV applications allow for individual cables to pass through the roof to the solar panel, ensuring a water tight seal.

The penetrating cables are individually flashed to maximise safety and eliminate wear that could occur from friction between the cable and the roof tiles often seen in non-purpose made solutions.

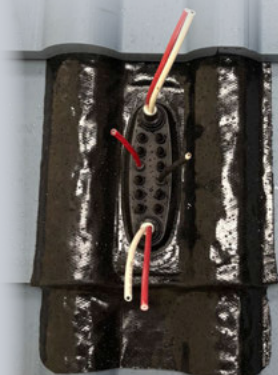

The speciality flashing for solar PV cables on tile, slate or metal roofs.



- Black EPDM High UV Resistance cone
- Available in Fast Flash® and Perform® Base
- Weather Seals and Protects up to 14 Cables
- Multipurpose, safe and weatherproof, all roof type cable entry solution


Pipe External	Roof Pitch	Base Size	Base Type	Code
0 - 7mm / 0 - 20mm	Tile / Slate / Metal	498 x 280mm	Fast Flash®	DRF14MCS
0 - 7mm / 0 - 20mm	Tile / Slate	498 x 300mm	Perform®	DLR14MCS
BLACK EPDM	EPDM will withstand constant temperatures at the roofline of -50°C to 115°C and up to 150°C intermittently			



SOLARDEK™ SLATE FLASH

WHEN IT COMES TO FLASHINGS, DEKS HAVE DECADES OF EXPERIENCE.

This enables us to combine innovation and tried and trusted methods for the solar and roofing trades that they can always rely upon.

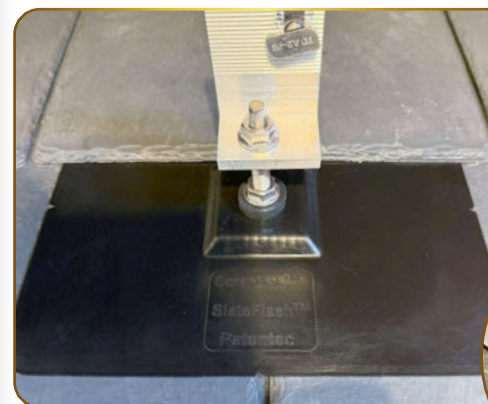

Why SolarDek™ Slate Flash?



- No removal of slates or tiles
- Zero pressure on the roof covering
- Fully waterproof design
- Super-fast installation



The fast, safe and fully waterproof way to mount solar arrays onto slate or tiled roofs - **with zero slate removal, zero pressure on the roof surface.**

Developed by an experienced slate roofer, **SolarDek™ Slate Flash** gives installers a **clean, quick and reliable fixing point** that works with all **Approved Hanger Bolt type** fixing systems.

**No risky angle grinding. No slate ripping.
No broken slates.**

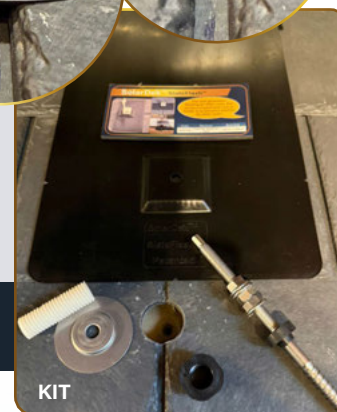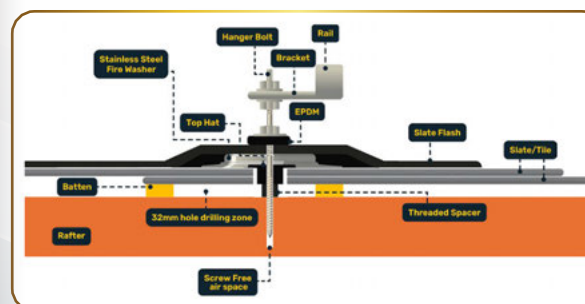

KIT

Code
SDSF-SL
Description
SolarDek™ Slate Flash Kit for Flat Roof Tiles. Kit Includes: 20 x Slate Flash Plate, 20 x Top Hat Spacer, 20 x Thread Adjuster, 20 x Fire Washers

DEKS FAST FLASH® - BBA ACCREDITED

Self-adhesive and user-friendly Lead replacement material

Fast Flash® is ideal for any application requiring a quick and secure flashing solution.

Fast Flash® can be installed on roofs with a minimum slope of 5° and on almost all roof materials. **Fast Flash®** is environmentally friendly and easy to install, as the reverse is self-adhesive, as well as being flexible and very workable.

If painting is required or where water is likely to travel from copper or bitumen onto **Fast Flash®**, use 100% acrylic low sheen exterior paint.



Easy to Install

Light weight, easy to trim and fully self-adhesive

Flexible and Very Workable

Malleable and stretchable. Dresses well to all profiles

Product Range

Rolls in four standard sizes, and colours black, grey and anthracite grey. (Grey colour matches old/worn Lead. Anthracite grey matches new Lead)

Environmentally Friendly


Aluminium stretch mesh cast in polymer rubber

Slower-Set Adhesive

Allows time for repositioning - 20/30 mins

Solutions

Ideal solution for flashing in roof solar panels, around roof lights, abutments and chimney stacks etc.

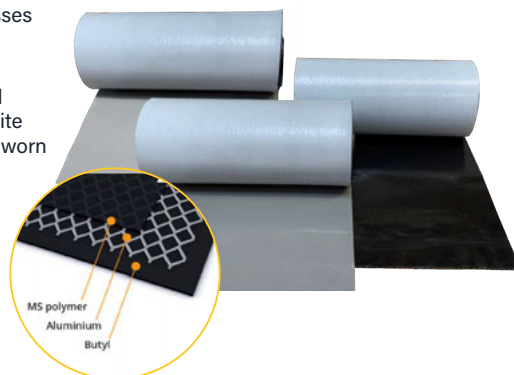

Product Code	Description	Weight
FFR5-140G	140mm x 5m Roll - Grey	2.4kg
FFR5-280G	280mm x 5m Roll - Grey	4.7kg
FFR5-370G	370mm x 5m Roll - Grey	5.9kg
FFR5-560G	560mm x 5m Roll - Grey	9.2kg
FFR5-140B	140mm x 5m Roll - Black	2.4kg
FFR5-280B	280mm x 5m Roll - Black	4.7kg
FFR5-370B	370mm x 5m Roll - Black	5.9kg
FFR5-560B	560mm x 5m Roll - Black	9.2kg
FFR5-140AG	140mm x 5m Roll - Anthracite Grey	2.4kg
FFR5-280AG	280mm x 5m Roll - Anthracite Grey	4.7kg
FFR5-370AG	370mm x 5m Roll - Anthracite Grey	5.9kg
FFR5-560AG	560mm x 5m Roll - Anthracite Grey	9.2kg

PERFORM® HAMMER

Shaping the covering material



For best results when shaping the covering material to suit profiled roofing, use a Perform® Hammer.

Code	Description	Weight
HAMMER	Perform® Hammer	0.5kg



OUR VISION

Our vision is to provide innovative product solutions by design and delight our customers with operational excellence at every step, ensuring we are their preferred and trusted partner of choice, helping them succeed.

OUR MISSION

DEKS' customer focus helps our customers find the right 'fit and forget' solution by design to solve their problems. We leverage our global manufacturing capability to design, develop and deliver solution oriented construction products, for the wholesaler, contractor and manufacturer to maximise their success.

Discover the rest of the DEKS range





✉ sales@deks.co.uk

🌐 www.deks.co.uk

☎ 01275 858 866



DEKS Industries Europe Ltd
West End Trading Estate
Blackfriars Road
Nailsea, Bristol, BS48 4DJ

While every effort has been made to ensure that the details in this brochure are correct at the time of print, we cannot accept responsibility for any errors or omissions.